

**096**


HIGH PRESSURE WASHER

097

POWER SPRAYER

098

TILLER

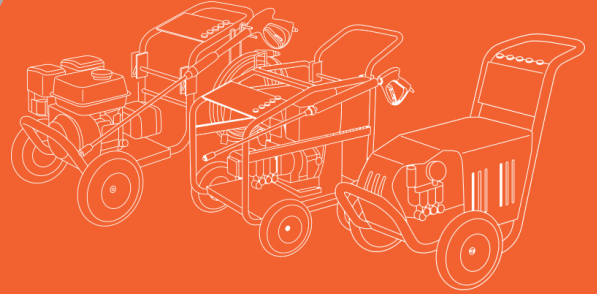

EXCALIBUR AGRICULTURE MACHINERY

Excalibur agriculture and garden machinery, including high pressure washer, power sprayer, power tiller (also known as cultivator), are built for power washing tasks, fertilizer spraying task and farming.

High Pressure Washer




10m high-pressure steel pipe adopts explosion-proof material to increase safety. Explosion-proof pressure is up to 500 kgf.

Stainless steel hook- store all accessories conveniently.

5 different nozzels can satisfy various usages.

We use stainless steel inner tube to prevent bursting and water leakage. Explosion-proof pressure is up to 300 kg.

We adopt industrial grade ceramic plunger and imported water seal which can resist abrasion and corrosion to extend service life.


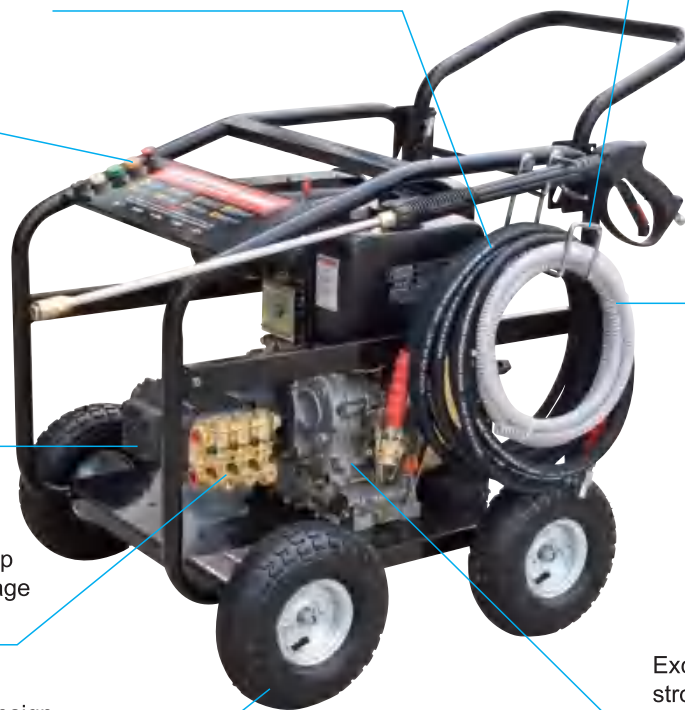


Thickened copper pump ensures no water leakage and large flow.

Excalibur diesel engine provides strong power to ensure washing machine high performance.

4 wheels design makes it move easily.

Different options of pump



Triplex Pump



Axial Pump



SW2200
SW2200B
SW2200D



SW2700B
SW2700D



SW2900



SW3600B
SW3600D

Model	SW2200	SW2200B	SW2200D	SW2700B	SW2700D	SW2900	SW3600B	SW3600D
Engine model	S20	S160	S178F	S200(E)	S178F(E)	S160	S390D(E)	S186F(E)
Power (HP)	5.0	5.5	6.6	6.5	6.6	5.5	13	10.0
Max Pressure (bar/psi)		150 (2200)		186 (2700)	186 (2700)	200(2900)	248 (3600)	248 (3600)
Water Flow (L/h)		380		756	756	756	1092	1092
Driving	Manual push							
Starting system	Manual / Electric start							
Packing size (L*W*H) mm		700*450*480		710*400*485		700x450x480	820*500*640	
Net weight (KG)	30	30	45	48	63	31	82	97



SW5000

Model	SW5000
Max Pressure (bar/psi)	345(5000)
Water Flow(L/h)	1500
Engine model	Honda GX630
Engine Displacement(cc)	688
Pump	Heavy Duty Triplex Pump
Gun(LPM)	40
Nozzel Type	Quick-connect
Cart	Steel cart
Fuel Capacity(L)	15.2
Fuel Type	Gasoline
Engine oil type	SAE30
Pump oil Type	SAE30
Packing Dimmension (L*W*H mm)	1100*750*1180

Power Sprayer



Stretcher frame



SS22
SS22B
SS22D
SS30

Trolley frame



QFG-1
轴流喷枪
Axial flow gun

QFG-2
塑料弯头喷枪
Plastic bend gun

QFG-3
弯头喷枪
Bend gun

QFG-4
直喷枪
Straight-head gun

QFG-5
塑料直喷枪
Plastic straight-head gun



Length Options:
30cm / 35cm / 40cm / 45cm / 60cm / 90cm / 120cm / 150cm

Model	SS22	SS30
Pressure(kg/cm ²)	20-35	20-35
Plunger NO*DIA*Stroke	3*22*16	3*30*20
Suction volume (L/min)	14-22	30-40
Speed (P.R.M.)	800-1200	800-1200
Driving	Manual Push	Manual Push
Starting System	Recoil Start	Recoil Start
Packing Size(L*W*H)mm	715*370*460	845*430*545
Net Weight(KG)	26	38
Engine	Robin EY20(5HP)	Robin EY28(7.5HP)
	Honda GX160 (5.5HP)	Honda GX270 (9HP)
	Excalibur Diesel Engine S178F (7HP)	Excalibur Diesel Engine S186FA(10HP)

Gasoline Type

Gear Type
SG610G



Belt Type
SG610B

Diesel Type

SD610
SD910



LAMP COVER OPTION

Model	Description	SG610G	SG610B	SD610	SD910
Engine	Engine Model	Gasoline Engine 7HP		Diesel Engine 178F(E)	Diesel Engine 186FA(E)
	Max Power(kW/rpm)	4.2kW/ 3600		4.9kW/ 3600	7.3kW/ 3600
	Fuel Tank Capacity	3.6L		3.5L	5.5L
	Displacement	207cc		296cc	418cc
	Starting System	Recoil start		Recoil start/ Electric start	
Tiller	Tilling Width	950-1050mm		1050mm	1350mm
	Tilling Depth	100-200mm		120-360mm	150-380mm
	Transmission	Gear Drive	Belt + Chain	Gear Drive	
Standard Equipment	Speeds	2Fwd+1Rev		2Fwd+1Rev	
	Handle Bar	Adjustable		Adjustable	
Dimension	Standard Equipment	350-6	350-6	400-8	400-8
	Dimmension	920*475*750mm		1030*580*870	1030*580*870

Optional Equipment

400-10	500-12	Anti-wrap blade	Paddy field wheel	Dry land blade
Deep tillage balde	Furrow opener	Potato/Garlic harvester	Single-side plough	Spiral blade